

不锈钢三相电机 STAINLESS STEEL - 3 PHASE WASHDOWN DUTY - 56 & 145T

特点：

- 变频-6-60HZ
- 轴伸上有防水密封
- 在端盖上有排水孔4个适用于任何安装下的排水
- T型排水（1）安装在非轴端盖的基座位置—可以被重新定位
- 第二个T型排水用在轴端用于客户安装在恰当的排水点


Features :

- INVERTER RATED - 6-60HZ CT, VT / PWM VFD 1.0 S.F
- Waterproof seals on shaft extensions
- Drain holes (4) in endbells to facilitate draining in any mounting position
- T-drain (1) comes installed in non-shaft endbell at base position - can be relocated
- 2nd T-drain for shaft end provided for customer installation at proper drainage point




型号	功率	转速	机座	电压	满负荷电流	效率	绝缘等级	过载系数	冷却方式	工作制	重量
GW REF. NO.	HP	RPM	FRAME	VOLTAGE	230V FLA	EFF%	INS. CLASS	S.F.	ENCL.	DUTY	WGT LB/KG
YXN5624D-B	0.33	1800	56C	230/460	1.2	73.4	F	1.15	TENV	CONT.	30/13.6
YXN5612D-B	0.33	3600	56C	230/460	1.3	54	F	1.15	TENV	CONT.	27/12.3
YXN5634D-B	0.50	1800	56C	230/460	1.7	78.6	F	1.15	TENV	CONT.	33/14.9
YXN5622D-B	0.50	3600	56C	230/460	1.9	56	F	1.15	TENV	CONT.	28/12.8
YXN5644D-B	0.75	1800	56C	230/460	2.3	81.6	F	1.15	TENV	CONT.	43/19.6
YXN5632D-B	0.75	3600	56C	230/460	2.5*	81.6*	F	1.15	TENV	CONT.	33/14.9*
YXN5664D-B	1.0	1800	56C	230/460	2.4*	81.6*	F	1.15	TEFC	CONT.	44/19.8*
YXN5674D-B	1.5	1800	56C	230/460	3.5*	81.6*	F	1.15	TEFC	CONT.	47/21.2*
YXN5684D-B	2.0	1800	56C	230/460	4.5*	81.6*	F	1.15	TEFC	CONT.	52/23.4*
YXN5662D-B	1.5	3600	56C	230/460	3.7*	81.6*	F	1.15	TEFC	CONT.	40/18.0*
YXN5672D-B	2.0	3600	56C	230/460	4.8*	81.6*	F	1.15	TEFC	CONT.	46/20.8*

LAYOUT AND MOUNTING DIMENSIONS

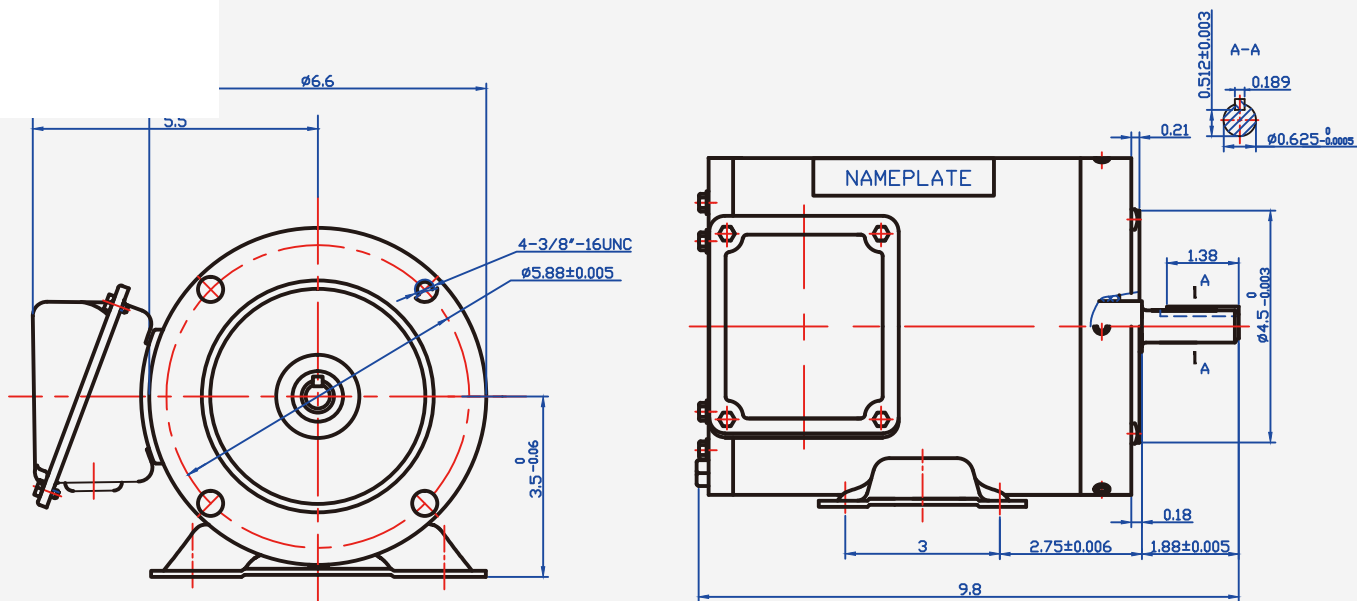

SMC MODEL	SMM MODEL	FRAME	PH	HP	Hz	Volt	RPM	thermal protector
YXN5624D-B	N56BC33S18D30NN31	56C	3	1/3	60	230/460	1800	NO
YXN5634D-B	N56BC05S18D30NN31	56C	3	1/2	60	230/460	1800	NO
YXN5644D-B	N56BC75S18D30NN31	56C	3	3/4	60	230/460	1800	NO
YXN5612D-B	N56BC33S36D30NN31	56C	3	1/3	60	230/460	3600	NO
YXN5622D-B	N56BC05S36D30NN31	56C	3	1/2	60	230/460	3600	NO
YXN5632D-B	N56BC75S36D30NN31	56C	3	3/4	60	230/460	3600	NO

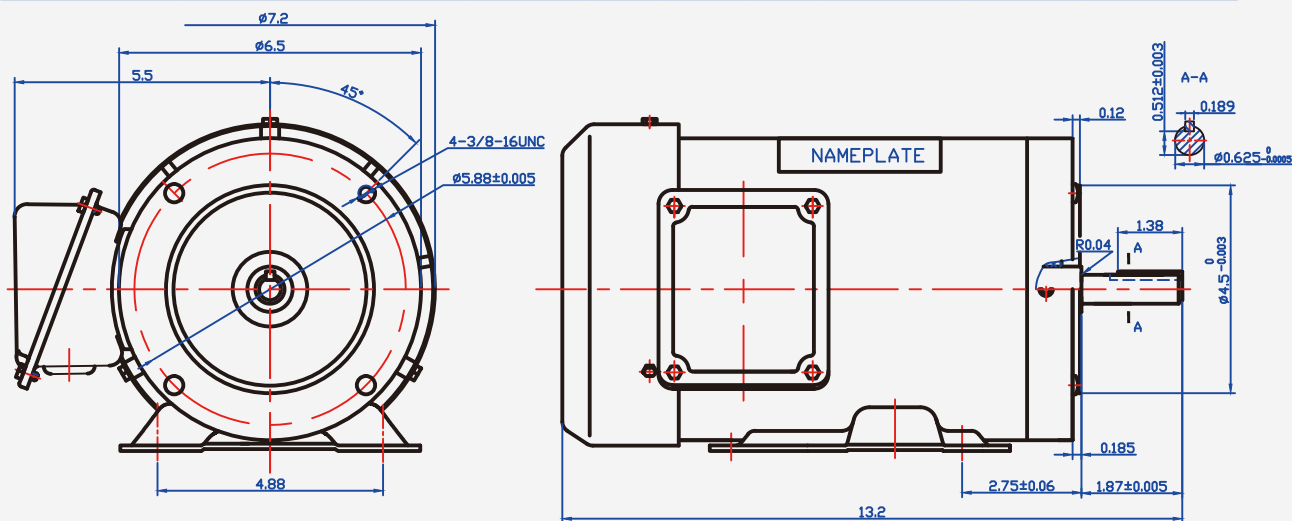

SMC MODEL	SMM MODEL	FRAME	PH	HP	Hz	Volt	RPM	thermal protector
YXN5664D-B	N56HC10S18D30FN31	56C	3	1	60	230/460	1800	NO
YXN5674D-B	N56HC15S18D30FN31	56C	3	1.5	60	230/460	1800	NO
YXN5684D-B	N56HC20S18D30FN31	56C	3	2	60	230/460	1800	NO
YXN5662D-B	N56HC15S36D30FN31	56C	3	1.5	60	230/460	3600	NO
YXN5672D-B	N56HC20S36D30FN31	56C	3	2	60	230/460	3600	NO

*以上数据仅供参考，可根据要求定制。